


Load the locking clips


1

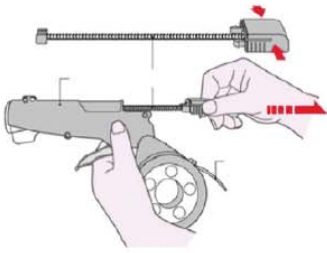

Remove the spring feeding guide by squeezing both sides of the locking end cap.


2

○ Right
✗ Wrong

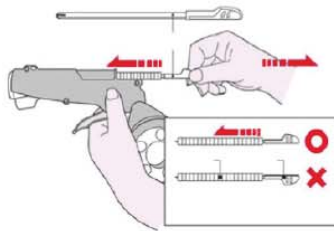


Insert the magazine of locking clips fully, and then remove the spine. The locking clips are now loaded.

3

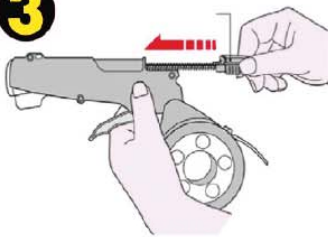

Replace the spring feeding guide.


4

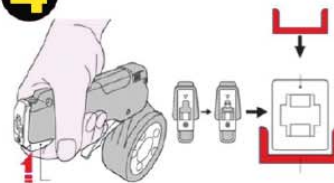

Before use, depress the cutter lever to position the first locking clip.


Load the strapping

1

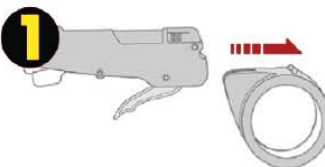


Remove the strap holder from the tool body by pulling it firmly.

2

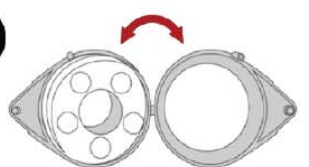


Open the strap holder and insert the strapping spool.

3

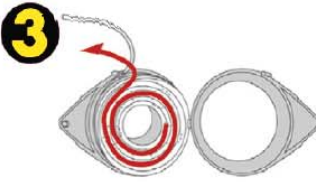


Pull out the strap with the serrated surface facing up.

4

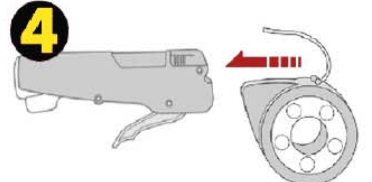


Reattach the spool holder to the tool body.

5

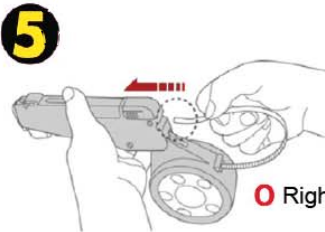

○ Right

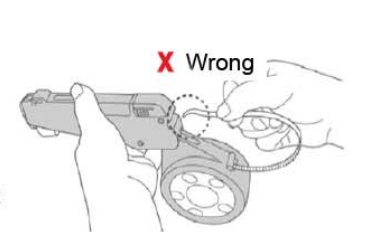


✗ Wrong

Insert the strap into the tool body with the smooth side up.

Using the Cable Tie Gun Ks 5


1

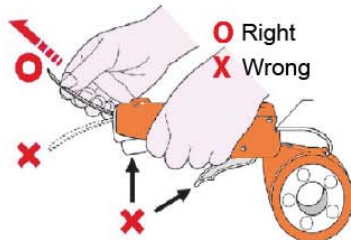

○ Right
✗ Wrong


Pull the strap out of the spool and insert it into the barrel. The strap will come through the locking clip and curve upward. DO NOT squeeze the cutter lever or tightening trigger at this time.

2

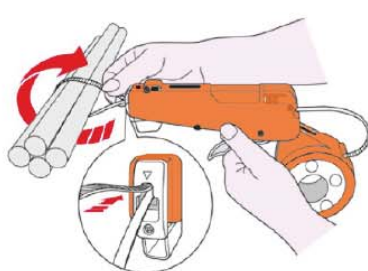


Wrap the strapping around the item(s) to be bundled with the serrated surface up. Insert the end of the strap into the locking clip until an audible "click" is heard.

3

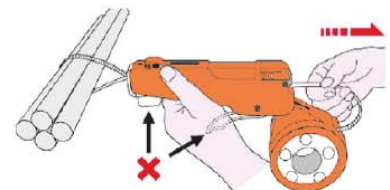


To tighten, pull the strap towards you from the back of the tool body. DO NOT squeeze the cutter lever or tightening trigger at this time.

4

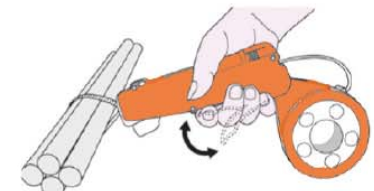

To complete the tightening, squeeze the tightening trigger until secure.

5

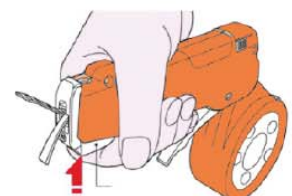

Cut the cable tie by firmly squeezing the cutter lever, then release it.